


All mooring cleats require a 10mm plywood backing pad glassed onto the underside of the deck with 1x DB. This applies to any other high load deck fittings.

Sail locker hatch size to suit moulded composite guttering. See post-side for dimensions. Cut carefully with a jigsaw to use cut-out as hatch lid.


Keep mooring cleats close the edge to avoid rope wear. Spring-loaded recessed cleats work well especially for the mid cleat where it can foul sheets. Minimum size 175mm in length.

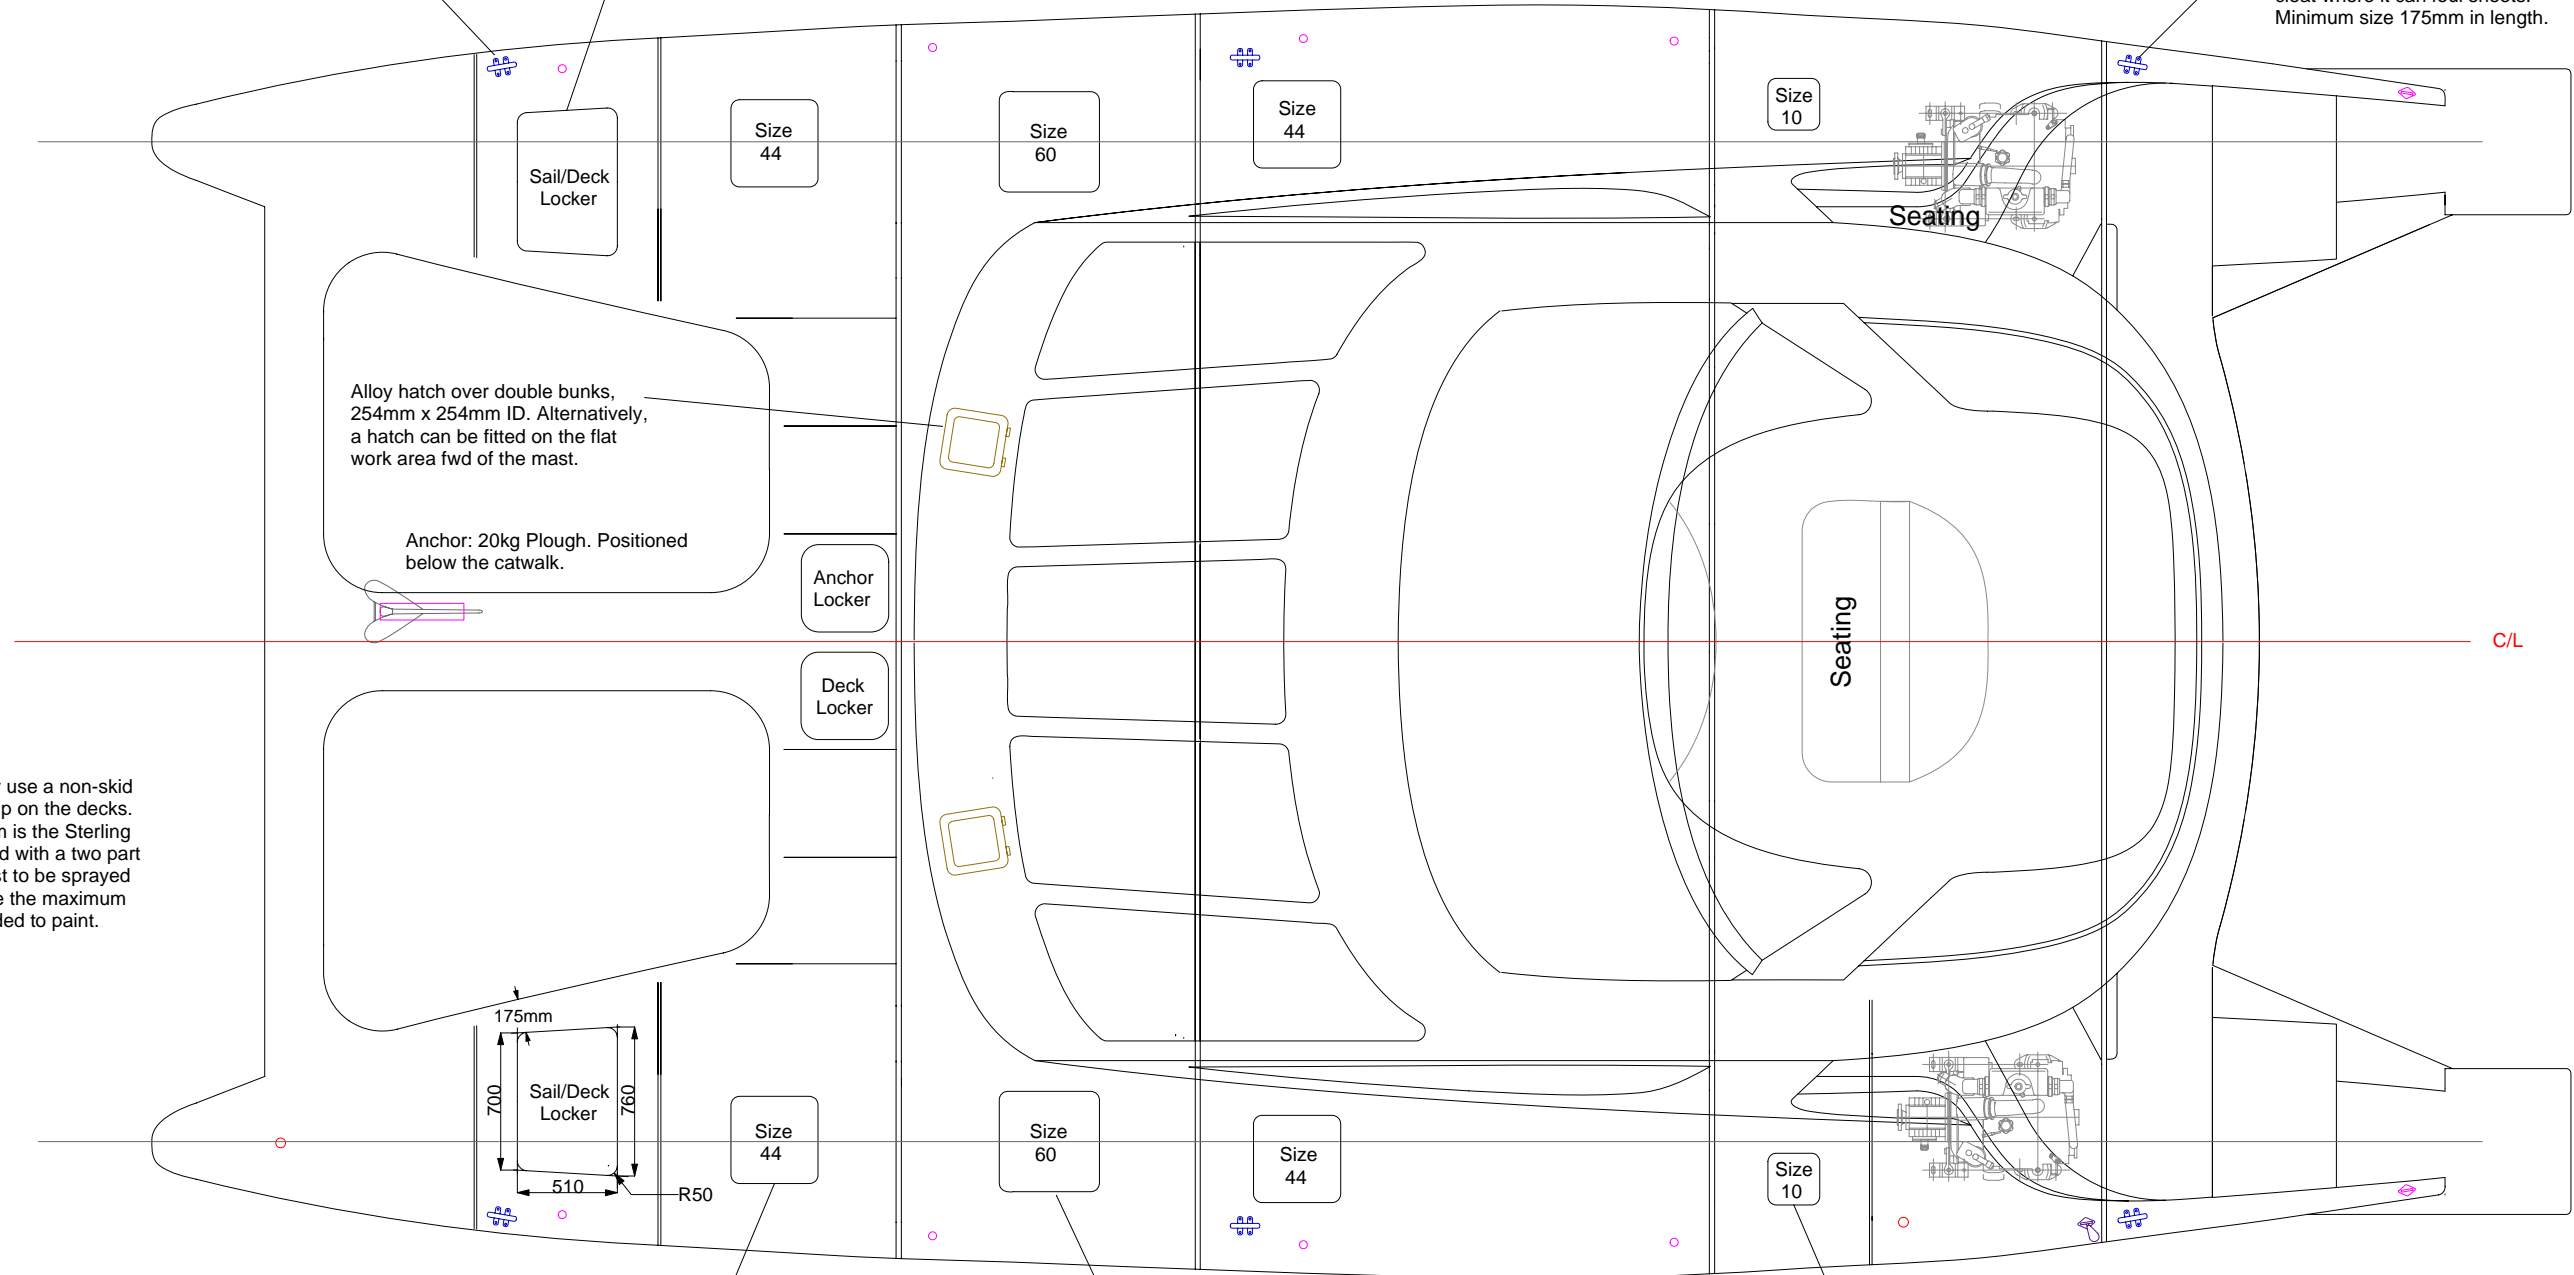

Note: As a safety feature only use a non-skid product with positive grip on the decks. A recommended system is the Sterling brand grit additive mixed with a two part polyurethane paint. Best to be sprayed or can be rolled. Ensure the maximum amount of grit to be added to paint.

Alloy hatch over double bunks, 254mm x 254mm ID. Alternatively, a hatch can be fitted on the flat work area fwd of the mast.

Anchor: 20kg Plough. Positioned below the catwalk.

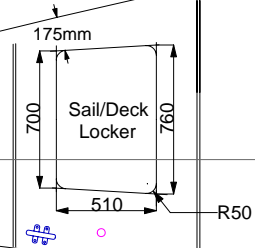

Lewmar low-profile hatch size 44:
Overall hatch size: 512mm x 512mm.
Cut-out size: 442mm x 442mm.

Note: All alloy hatches pre-cut to suit Lewmar brand.

Lewmar low-profile hatch size 60:
Overall hatch size: 577mm x 577mm.
Cut-out size: 507mm x 507mm.

Lewmar low-profile hatch: Size 10:
Overall size: 330mm x 330mm
Cut-out size: 260mm x 260mm.